

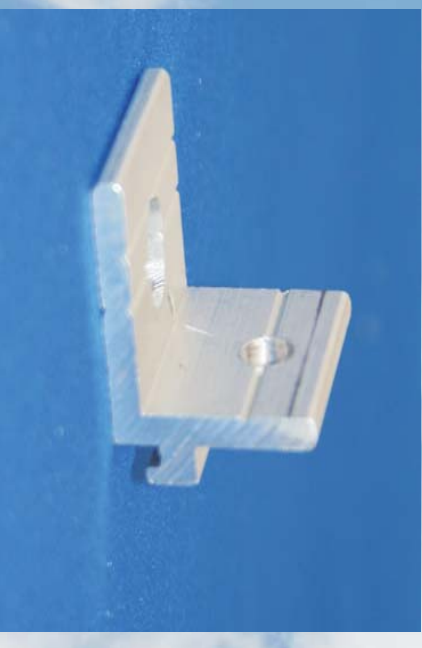
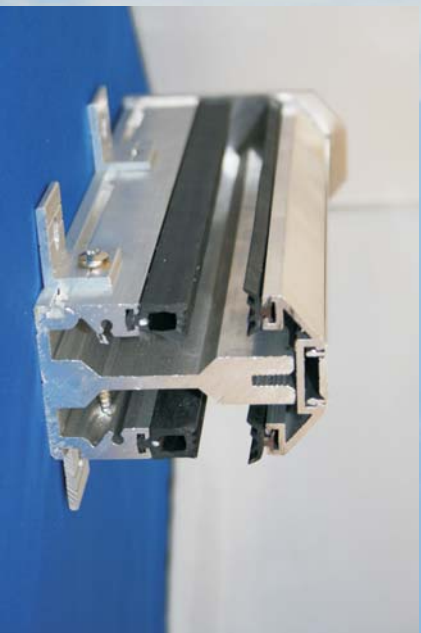





# Howells Glazing Systems - HG 50 Medium Duty

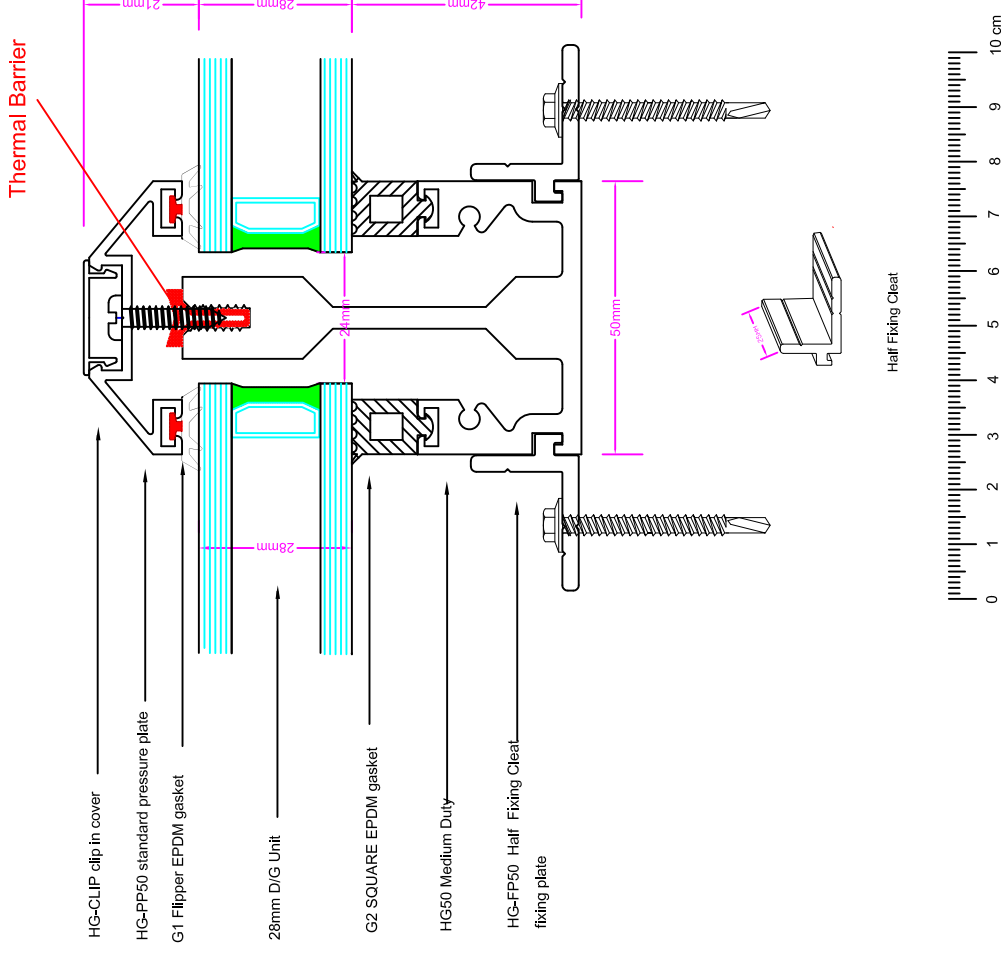


# Typical Glazing Bar Details

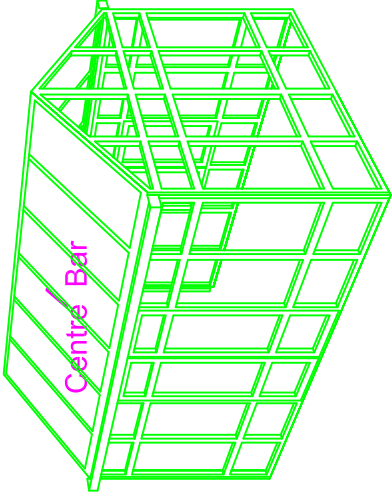


# Typical Glazing Bar Details

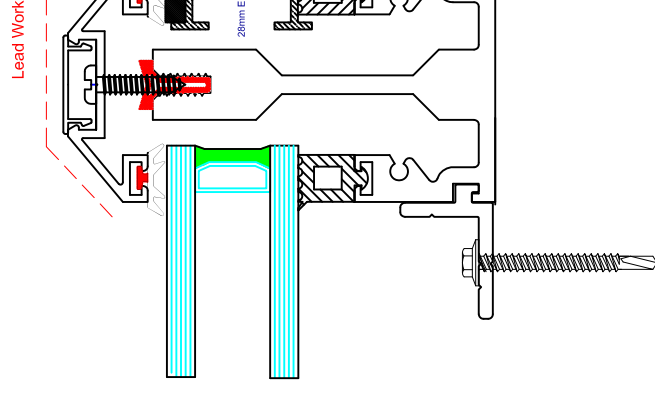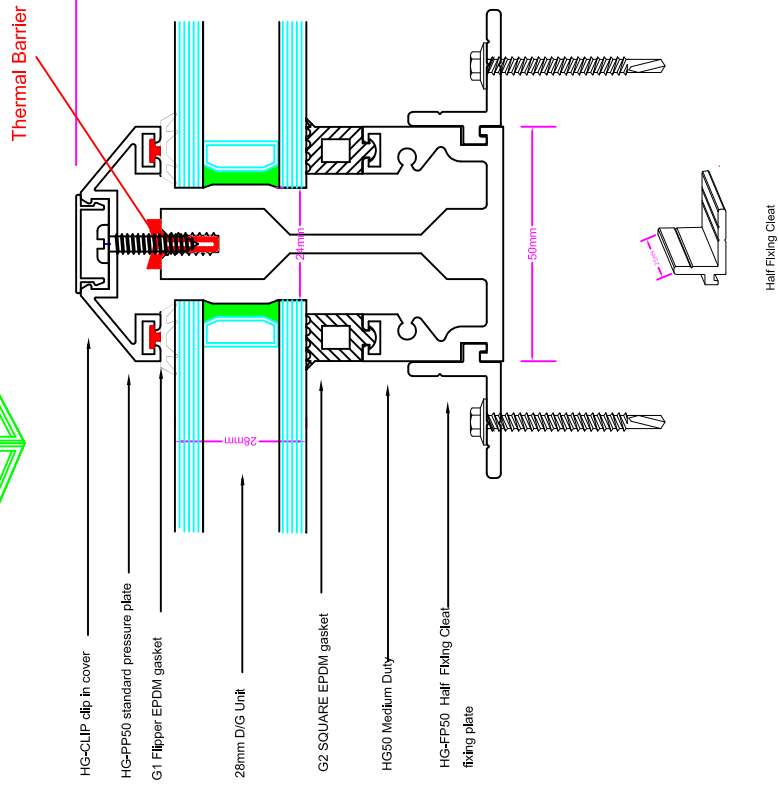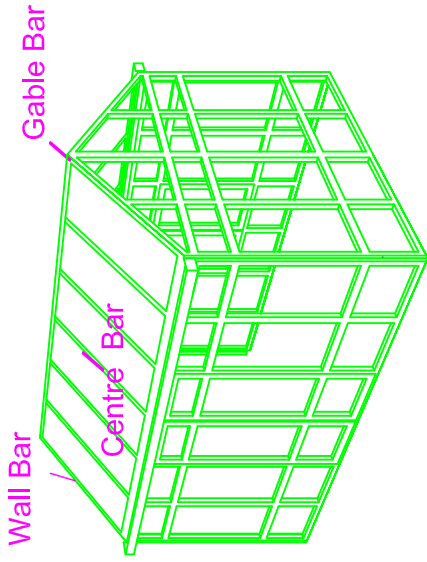

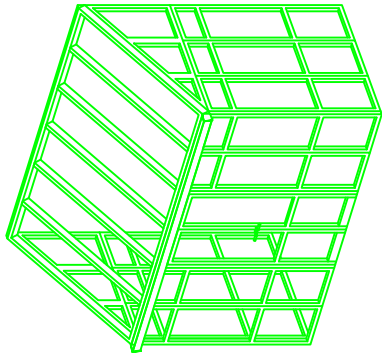


10 Degree Pitch Shown

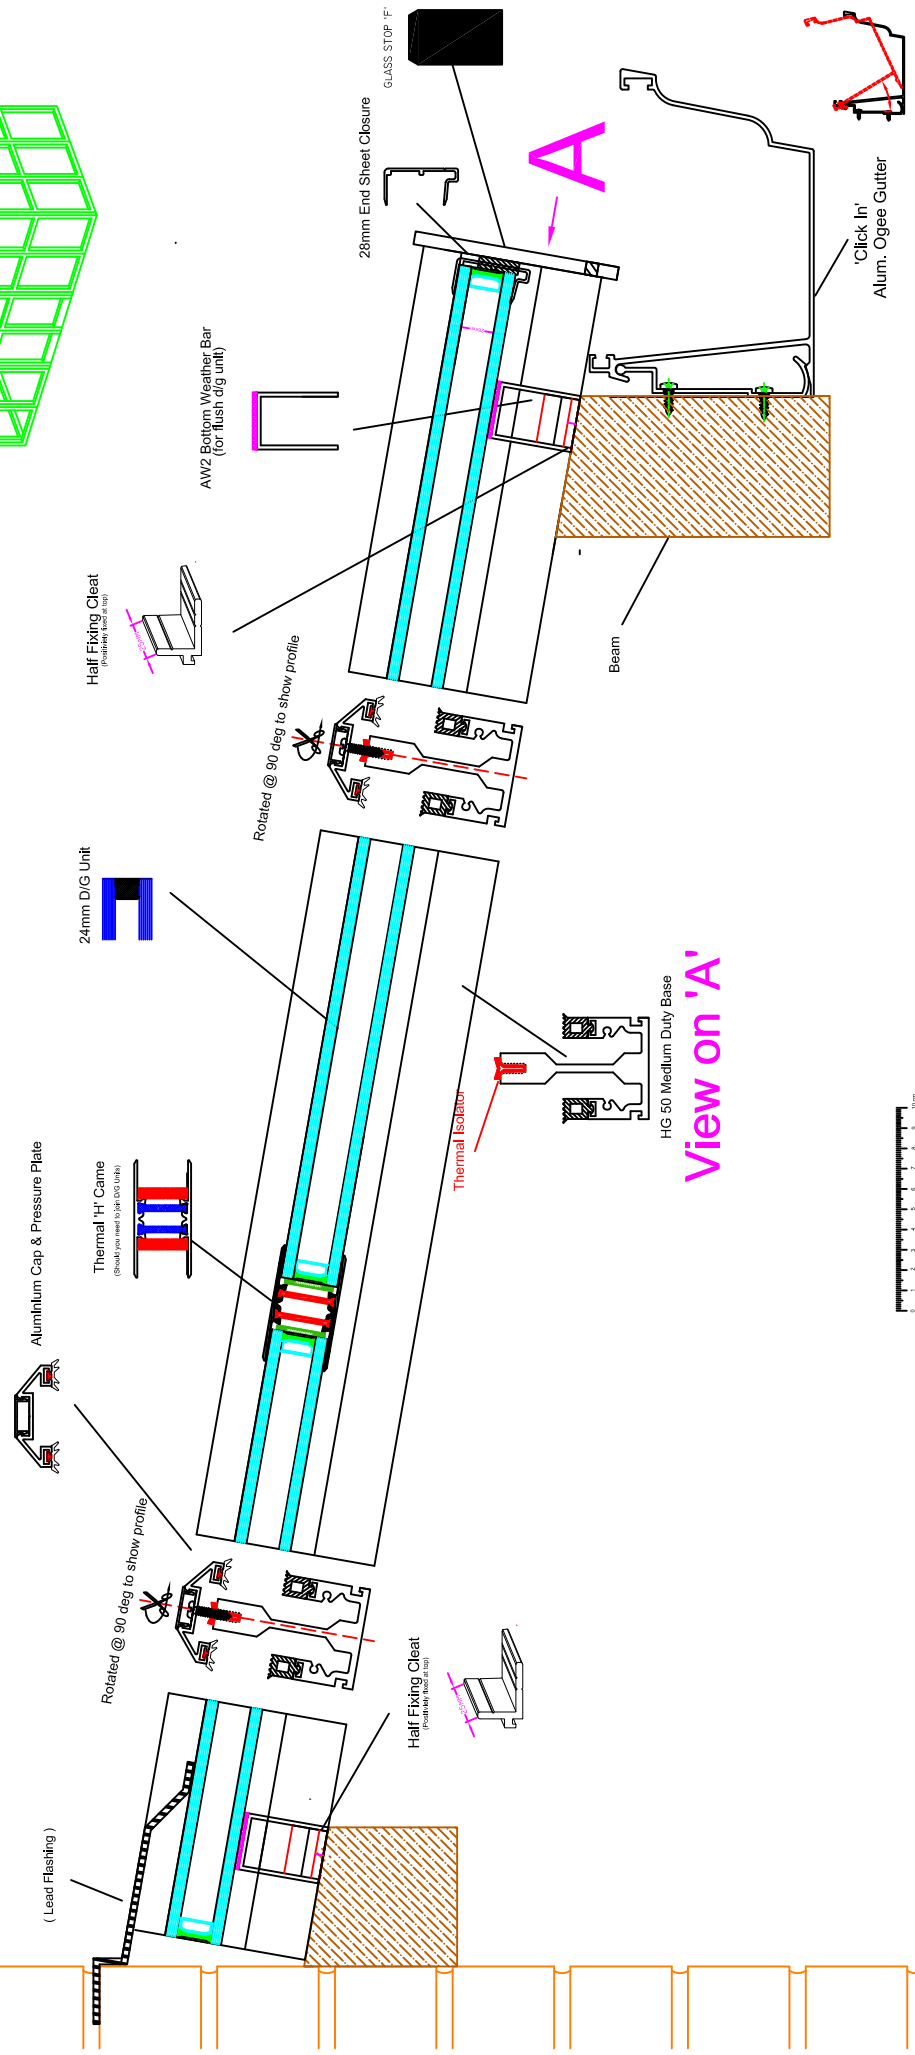


# Typical Roof Vent

Roof Vent

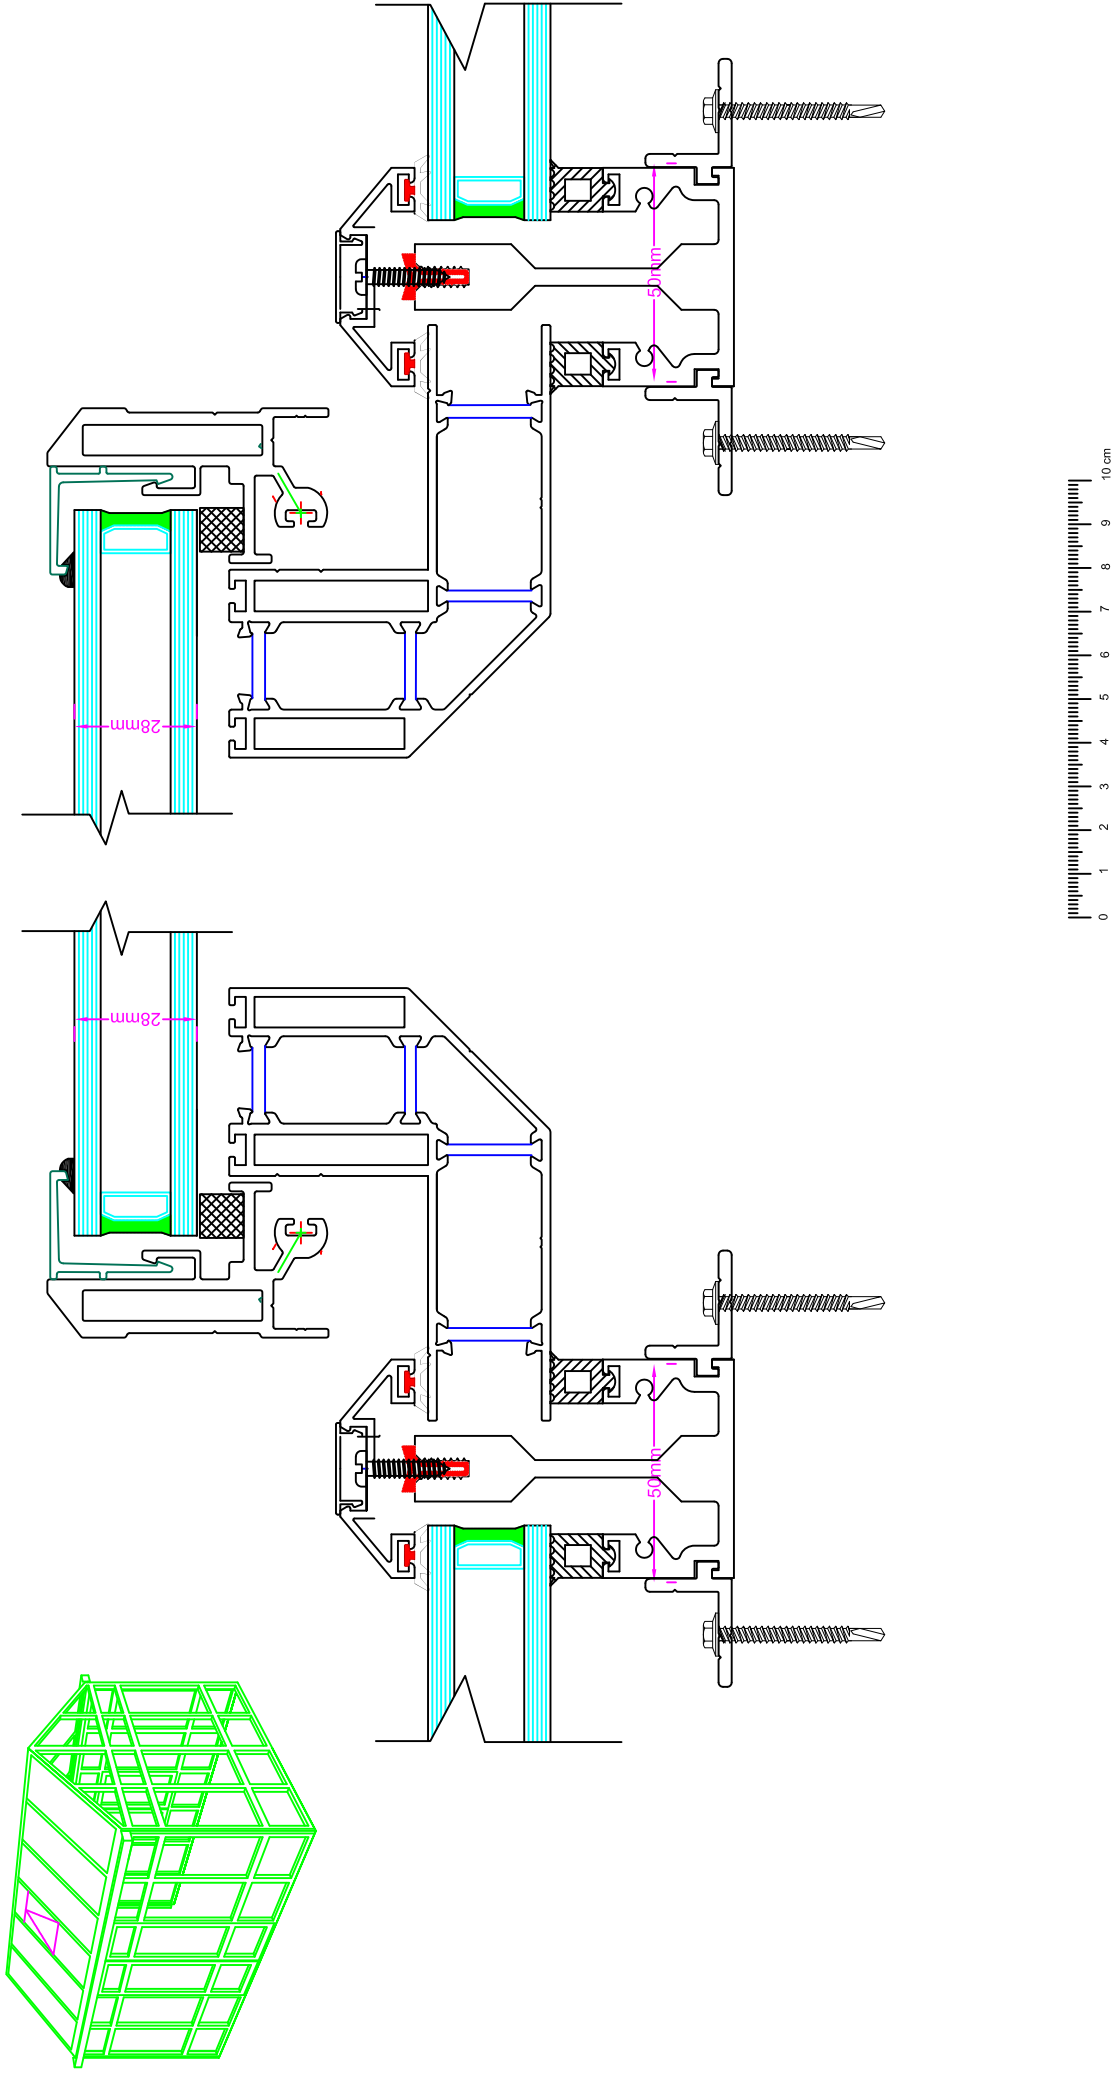


## Typical Roof Vent

Roof Vent



## HG Thermally Broken Roof Vent Vent Assembly (Electric)

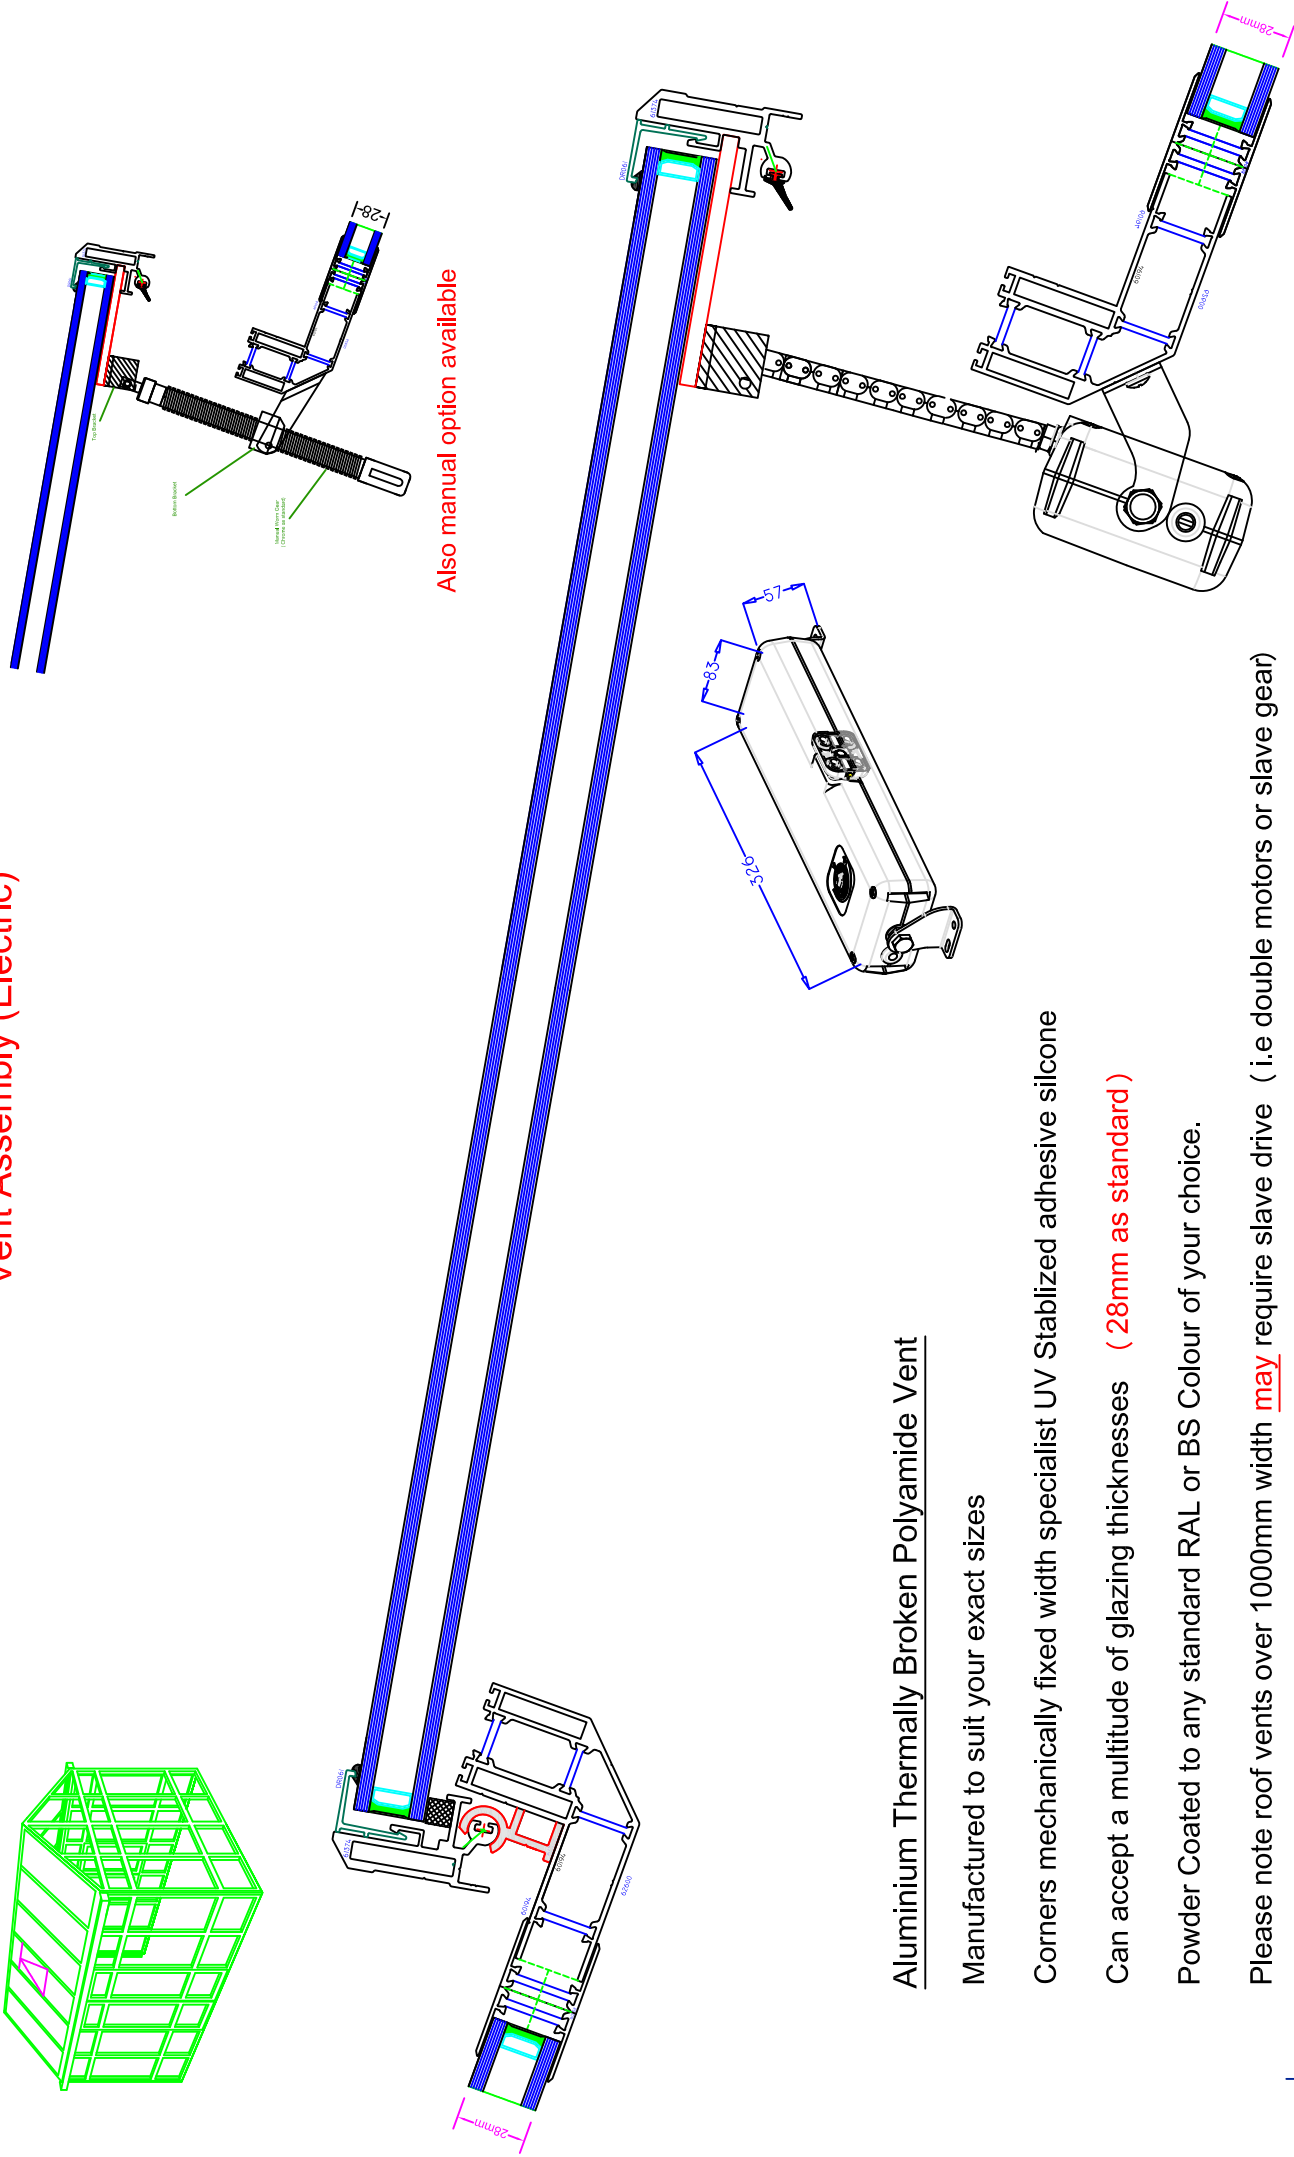

Also manual option available

## Aluminium Thermally Broken Polyamide Vent

Manufactured to suit your exact sizes

Corners mechanically fixed with specialist UV Stabilized adhesive silicone

Can accept a multitude of glazing thicknesses (28mm as standard)

Powder Coated to any standard RAL or BS Colour of your choice.

Please note roof vents over 1000mm width may require slave drive (i.e. double motors or slave gear)

Glass Stop

Pressure Plate 50

Sliding Half Cleat

Fixed Half Cleat

